


F745DR



Installation Manual: 74 ½" Island with 2 Rollouts and 3-Drawers

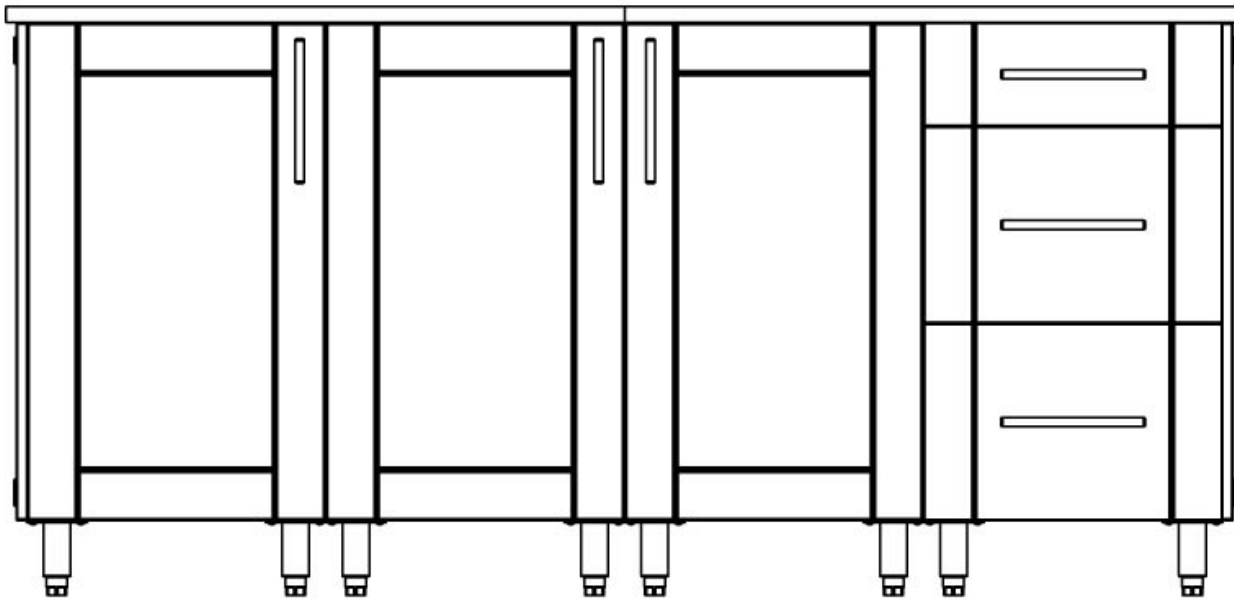

Important! All gas hookups, including conversions from propane to natural gas, must be performed by a licensed plumber. Attempting this work without a qualified professional can result in serious injury or death. Always verify and comply with local building and venting code requirements before installation.

Steps for a Successful Installation

1. Prepare the Site

- 1.1 Your outdoor kitchen should always be installed on a stable surface (patio/deck/balcony/rooftop) which should be as near to level as drainage requirements allow.
- 1.2 All cabinets come standard with adjustable stainless steel legs. However, in instances of extreme slope, or very large kitchens, footings may be needed to compensate if it falls out of the adjustable range of the legs.
- 1.3 Your kitchen has been designed to be freestanding and does not need to be affixed to the ground/wall. For extreme environments, such as high wind areas, we suggest that your kitchen be secured to an appropriate support structure. Please consult with your contractor/engineer for specifics.
- 1.4 Verify with your contractor/engineer to ensure that the surface is designed to support the weight of the kitchen.


2. Planning for Appliances

- 2.1 Your island cabinetry is made from weatherproof combustible materials and therefore, each gas appliance requires an insulated heat jacket. Check your specific island configuration for the necessary parts.
- 2.2 Please review the owner's manuals provided with your appliances before installation and ensure the hook-up is done by a licensed professional in accordance with local codes.

Important! All gas hookups, including conversions from propane to natural gas, must be performed by a licensed plumber. Attempting this work without a qualified professional can result in serious injury or death. Always verify and comply with local building and venting code requirements before installation.


3. Planning for Services (Gas/Electrical/Plumbing)

- 3.1 Vent holes are included in most cabinets to make service planning and implementation as easy as possible.
- 3.2 Local codes have specific requirements and restrictions for all services. Please ensure that planning and installation is performed by a locally licensed tradesperson.

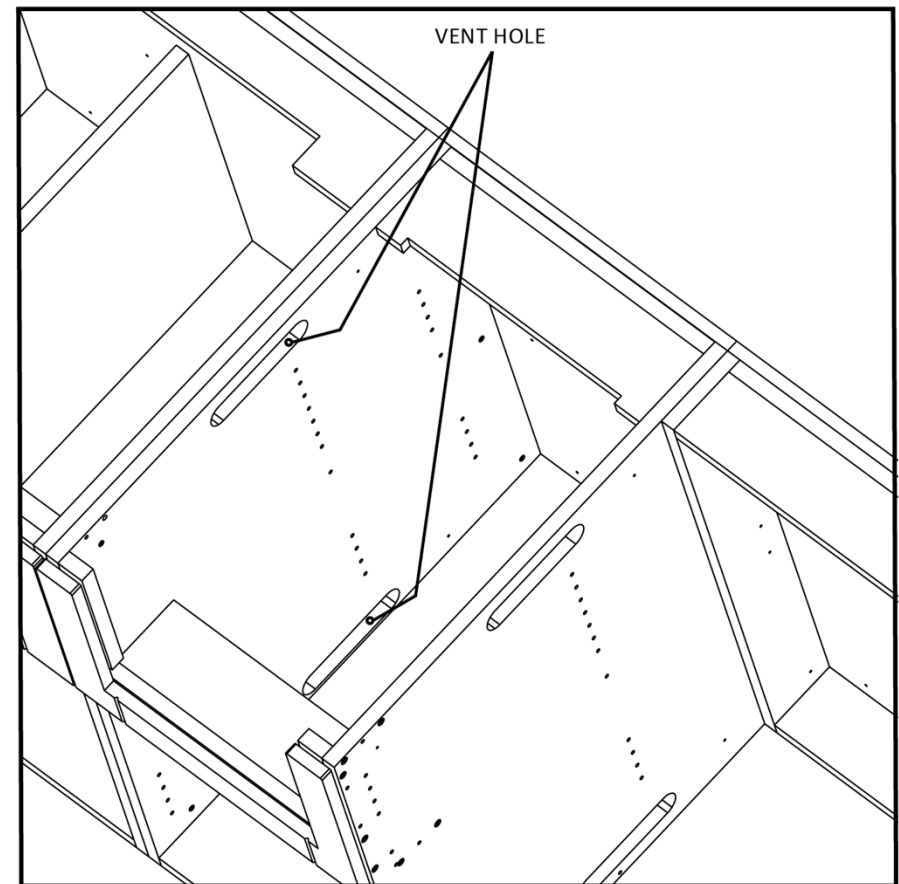


Island Installation

Tools Required



C-Clamps



Tape Measure




Phillips
Screwdriver



Electric Drill with
Phillips
and Square bit

Hardware Included




#8 Screws
(Attachment Screws)



Legs

Countertop Installation


Tools Required



Box Level




Pencil



Caulking Gun




Outdoor Rated Construction Adhesive
& Silicone Caulk



Shims

CAUTION: Safety glasses and gloves recommended

What’s Required

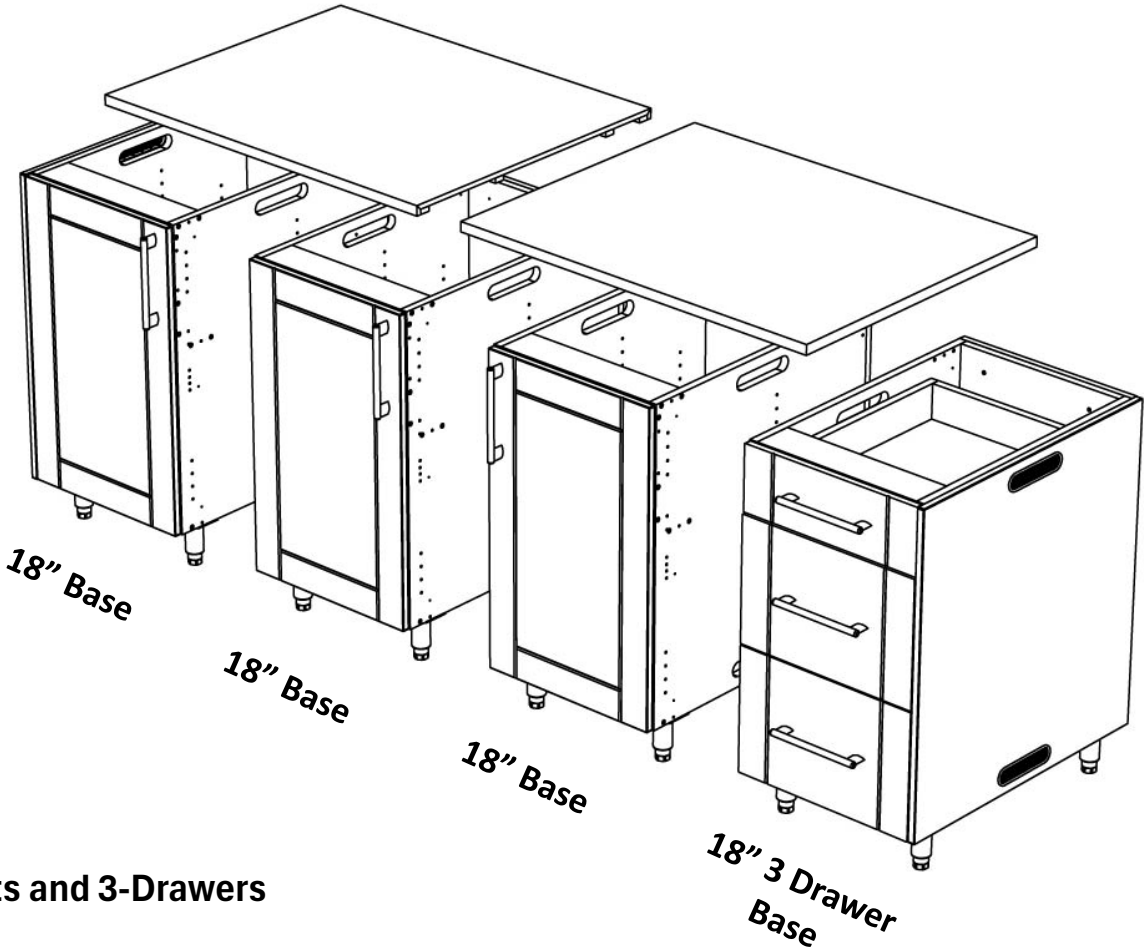

Item List: F745DR - 74 ½" Island with 2 Rollouts and 3-Drawers

Item Number	Item Description	Qty
AOS-B1827FHL-2T	18” wide Full Hgt Base Hinged Left w/2 Rollouts	1
AOS-B1827FHL	18” wide Full Height Base Cabinet - Hinged Left	1
AOS-B1827FHR	18” wide Full Height Base Cabinet - Hinged Right	1
AOS-B3D1827	18" wide 3-Drawer Base Cabinet	1
BEP28.530-2PK	28 ½" x 30" Matching Base End Panels - 2-Pack	1
CTL-JUPL6-GF	Glacier Frost Countertop Module # JUPL6	1
CTL-JUPR6-GF	Glacier Frost Countertop Module # JUPR6	1
SS Screw #8x1.25	#8 x 1¼” Square Drive Connector Screw	30
Clear Cover 10x20	10' x 20' Clear Dust Cover Sheet	1


Step 2: Configuring Your Island

REQUIRES

Box Level

- Position your island cabinet modules in the desired location. *If you're installing the island against a wall, leave a min. 5/8" gap to accommodate the countertop overhang
- Before starting your installation, remove the doors and any drawers, and place them somewhere safe to avoid any damage
- Using the box (bubble) level, check that each cabinet is level and plumb. Check from side to side and from front to back
- Ensure the side panels of all the cabinets are flush in front and along the top
- Twist the end of the legs to make any necessary adjustments

***It is essential that the cabinets are all level before the countertop is installed.**

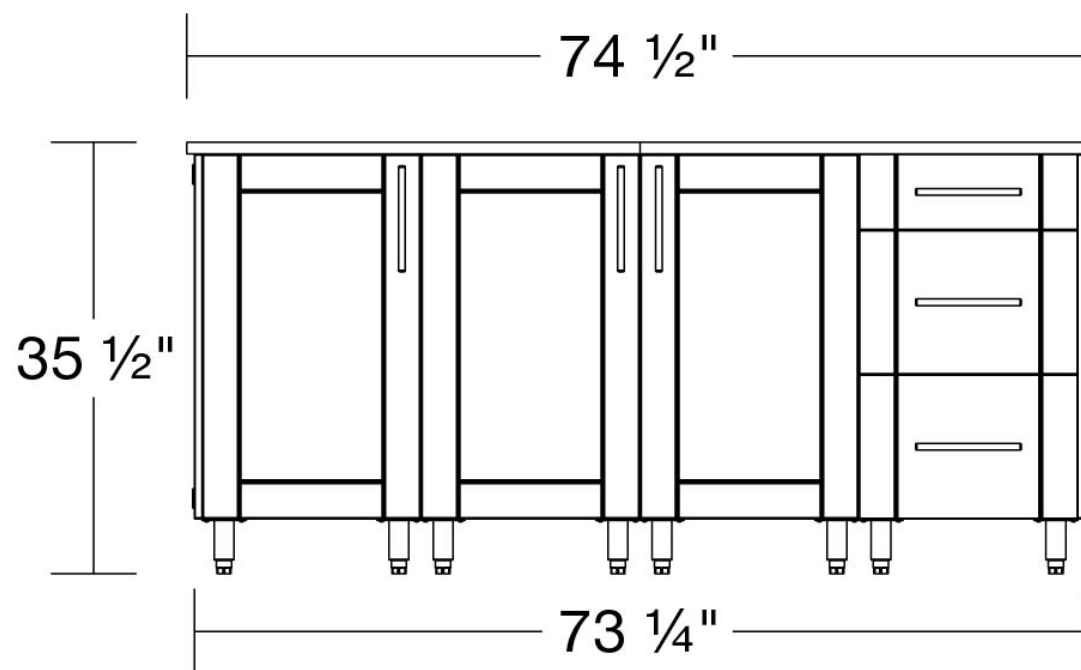

Step 3: Base Cabinet


REQUIRES

2x C-Clamps, Drill, & Box Level
6 x Attachment Screws

Flush Back Panels
Before Tightening
Attachment Screws

Flush
Front &
Top Edges

Align the attachment screw holes of the right side of the Base cabinet to the left side of the Grill Base cabinet. Then, temporarily hold each cabinet together using C-clamps. Lastly, use the 6 attachment screws to connect each cabinet together.

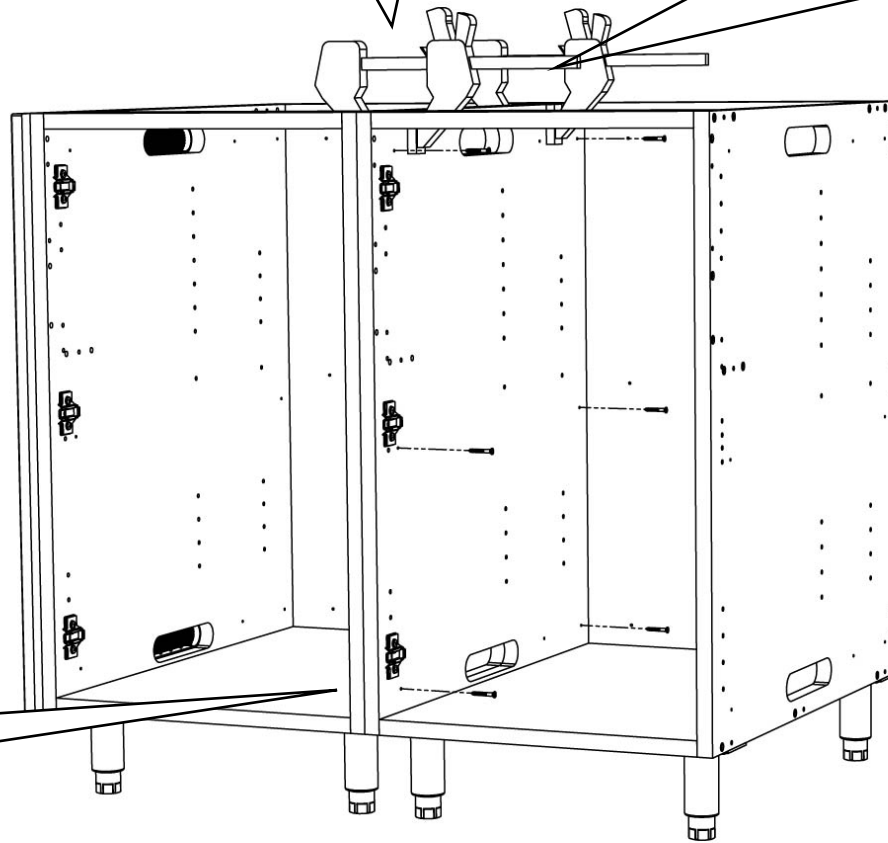


Step 4: Base Cabinet

REQUIRES


2x C-Clamps, Drill, & Box Level
6 x Attachment Screws

Flush Back Panels
Before Tightening
Attachment Screws

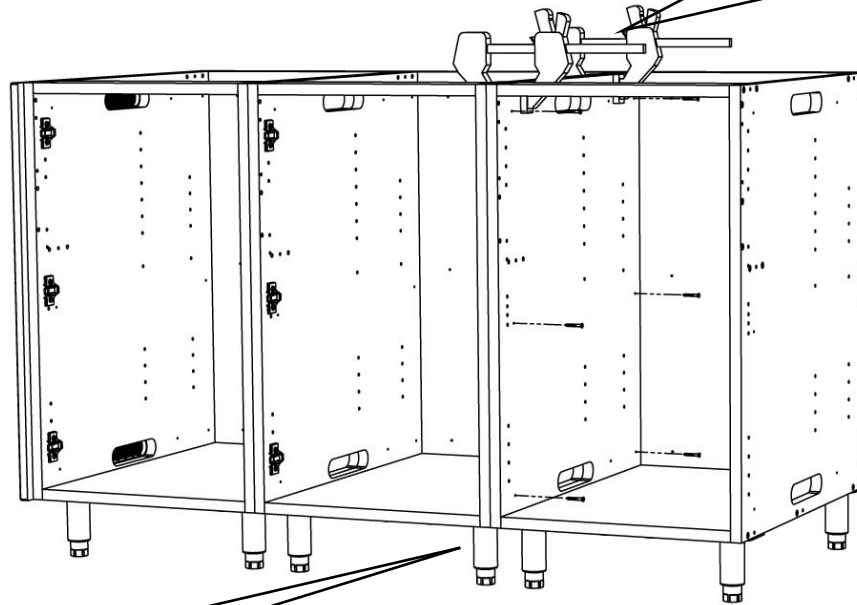

Flush
Front &
Top Edges

Align the attachment screw holes of the right side of the Base cabinet to the left side of the Grill Base cabinet. Then, temporarily hold each cabinet together using C-clamps. Lastly, use the 6 attachment screws to connect each cabinet together.

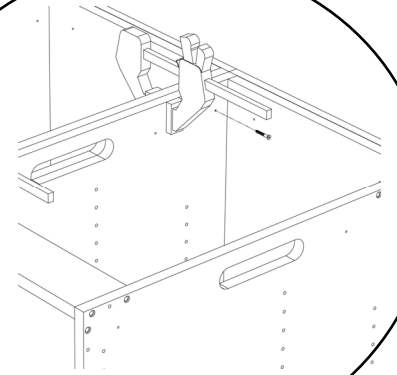


Step 5: Base Cabinet

REQUIRES

- 2x C-Clamps, Drill, & Box Level
- 6 x Attachment Screws

Flush Back Panels
Before Tightening
Attachment Screws

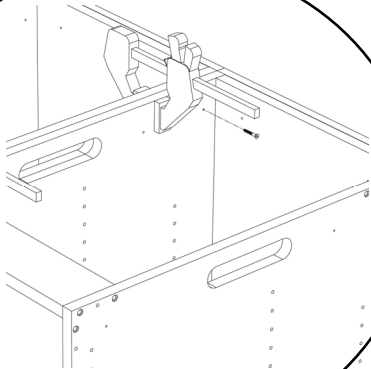


Flush
Front &
Top Edges

Align the attachment screw holes of the right side of the Base cabinet to the left side of the Grill Base cabinet. Then, temporarily hold each cabinet together using C-clamps. Lastly, use the 6 attachment screws to connect each cabinet together.

Step 6: Leveling Island & Dry-Fit Countertops


REQUIRES
Box Level

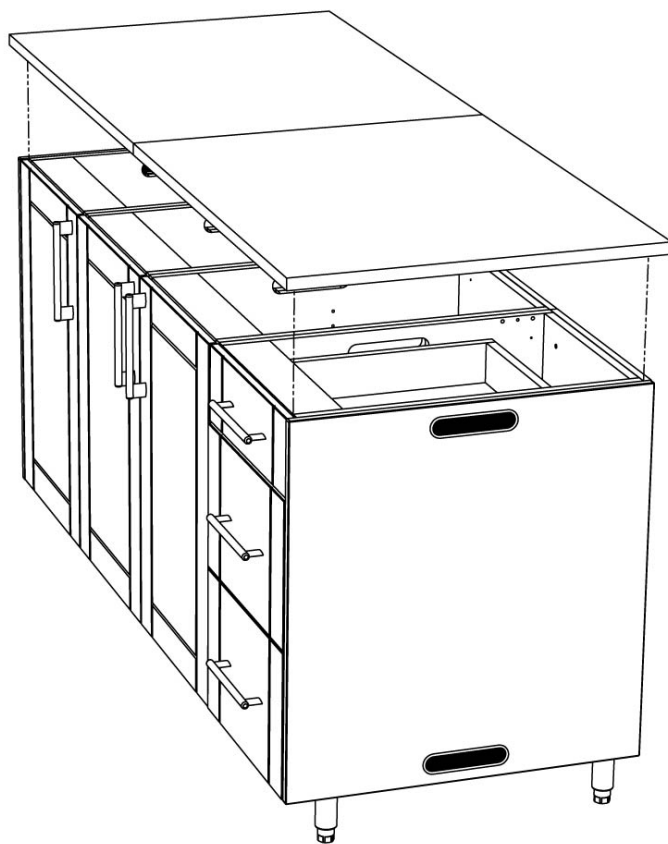

Use the box level to check that all the cabinets are still level and flush. Place the countertop components on the island. Make sure the Grill Liner notches in the countertop are lined up with the apron front cutouts.

Step 7: Installing Countertop



REQUIRES
Pencil

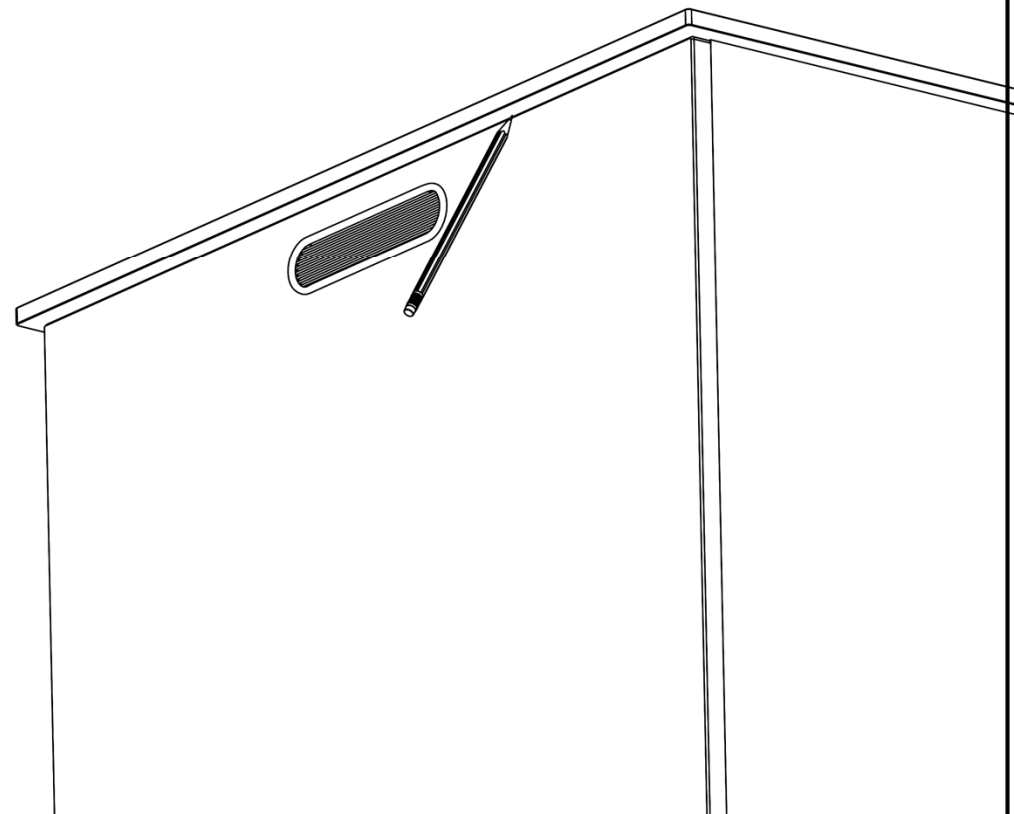

Once the countertop and Grill Liners are positioned correctly, use a pencil to mark the underside of the countertop.

Step 8: Installing Countertop


REQUIRES
Adhesive

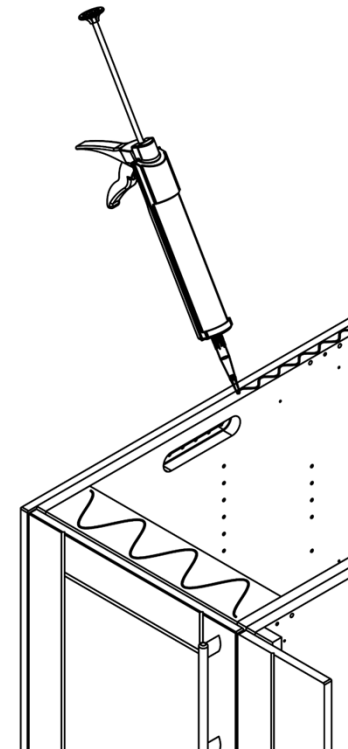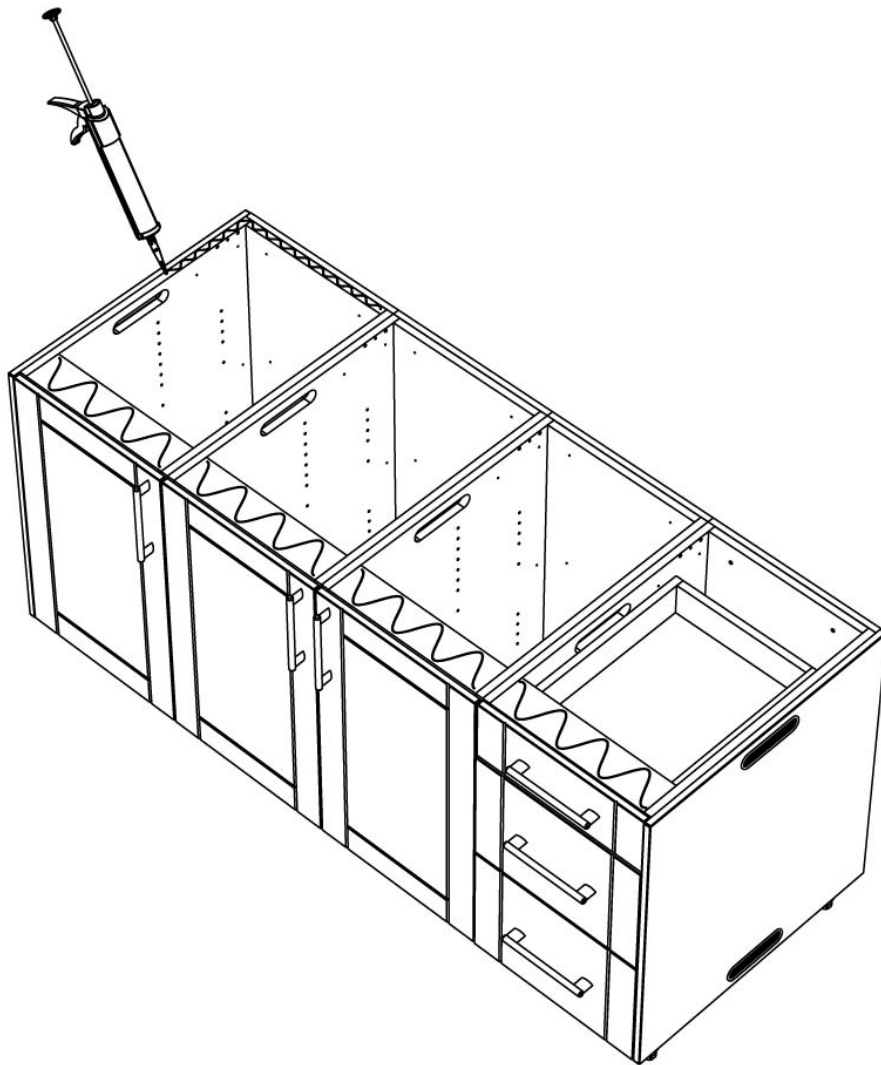

Remove the countertop components and set them aside. Apply Outdoor Rated Construction Adhesive liberally to the front and back rails and along the top edge of the cabinets, as shown. Ensure all adhesive is applied to the 3/4" All-Weatherboard® not the 5/8" HDPE.


Step 9: Installing Countertop

REQUIRES
Box Level

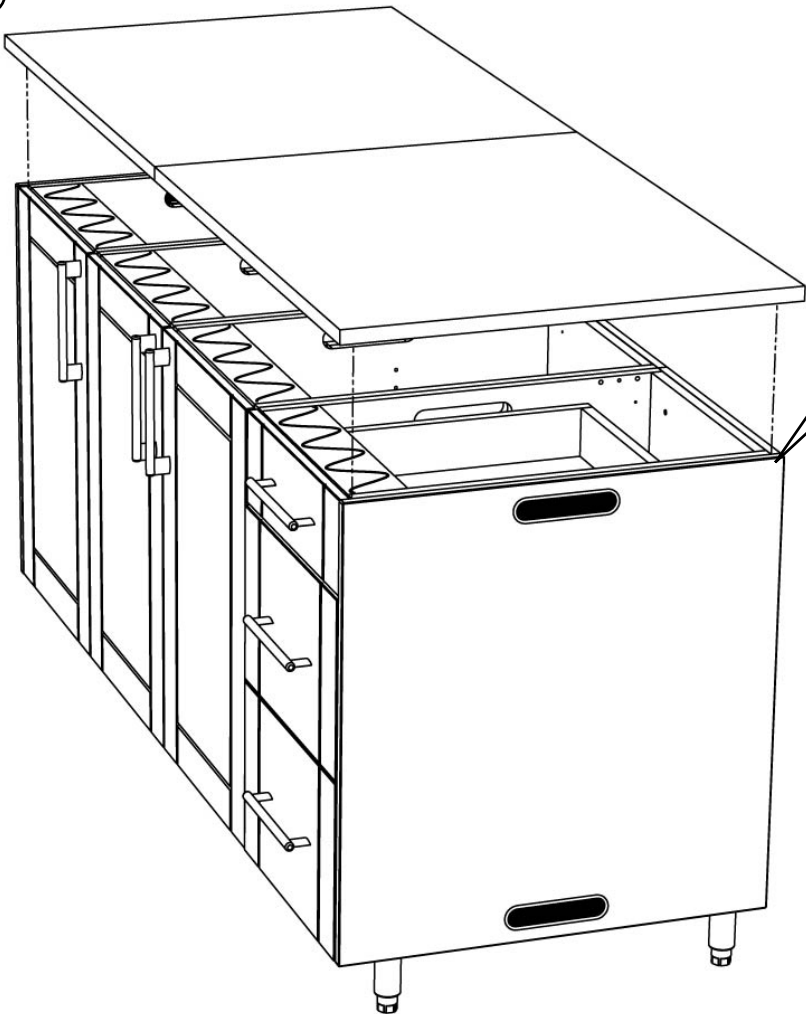


Carefully replace the countertop components using the pencil reference marks. Make sure the countertop pieces fit tightly together and are level; shim if necessary. Use blue painter's tape to hold the pieces together. Allow 24 hours for the adhesive to fully cure before reinstalling the Grill Liner. While the adhesive cures, cover your island with the clear plastic dust sheet provided.

Installing Adjustable Shelves

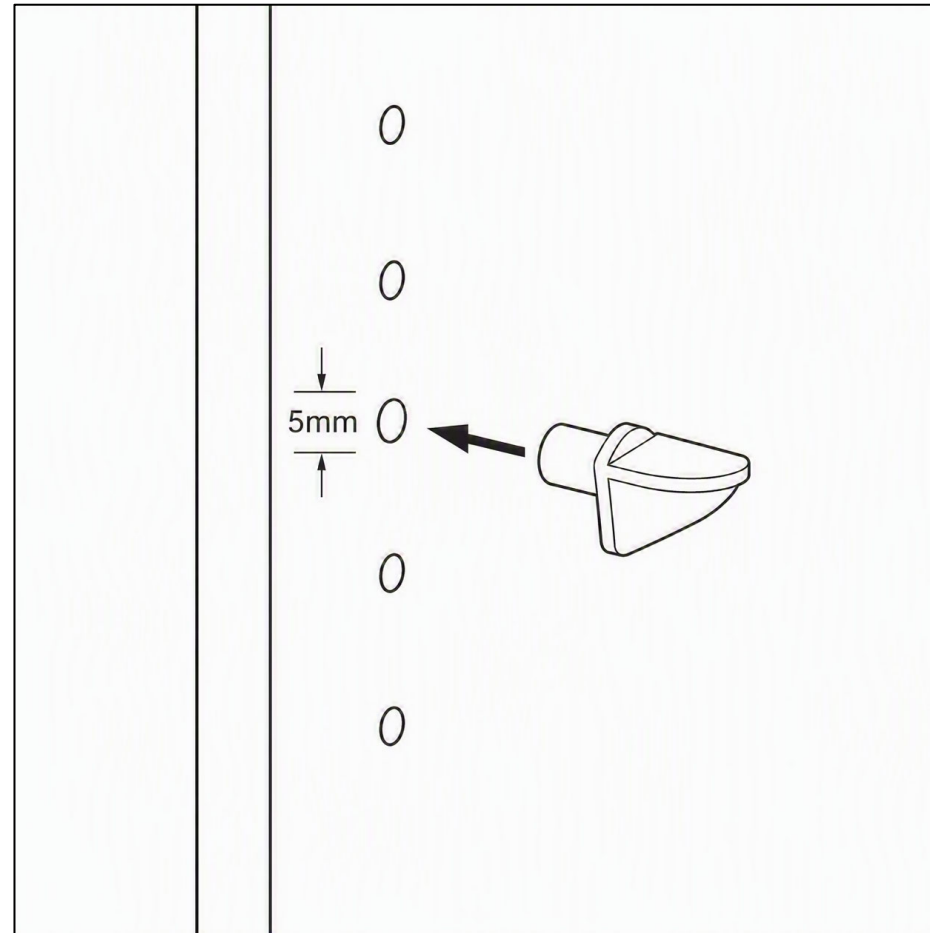


If your island has adjustable shelves. Insert the shelf retaining pins at the desired height in all four holes and set the shelf on top. Repeat for the second shelf.

Removing Propane Pull-Out Trays or Roll-Out Trays

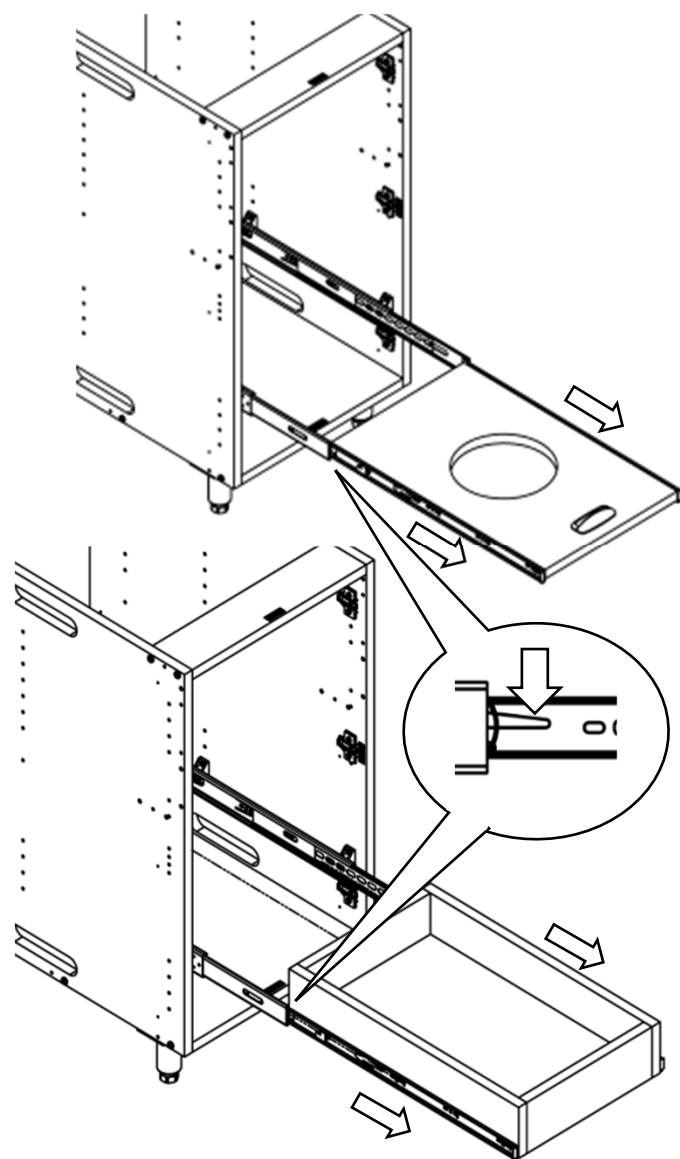


If your island contains internal accessories like a **Propane Pull-Out or Roll-Out Trays**. Carefully remove the propane pull-out or roll-out tray by pressing down on the white tab pull runner member and pulling apart from larger runner member.

Installing Propane Pull-Out Trays or Roll-Out Trays

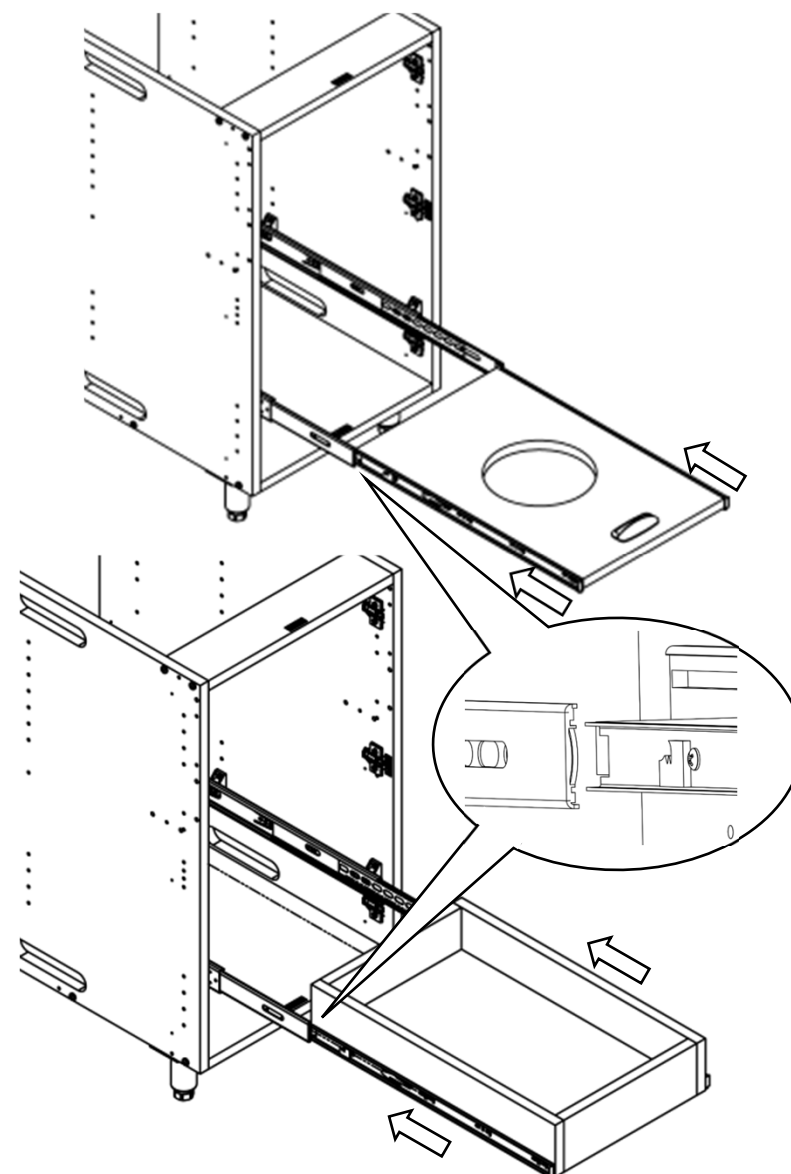


Carefully slide the propane pull-out or roll-out tray into the larger runner members by inserting the smaller runner members into the plastic guides at the front of the larger members. You should hear a 'click' when fully inserted.

Installing Propane Pull-Out Trays or Roll-Out Trays

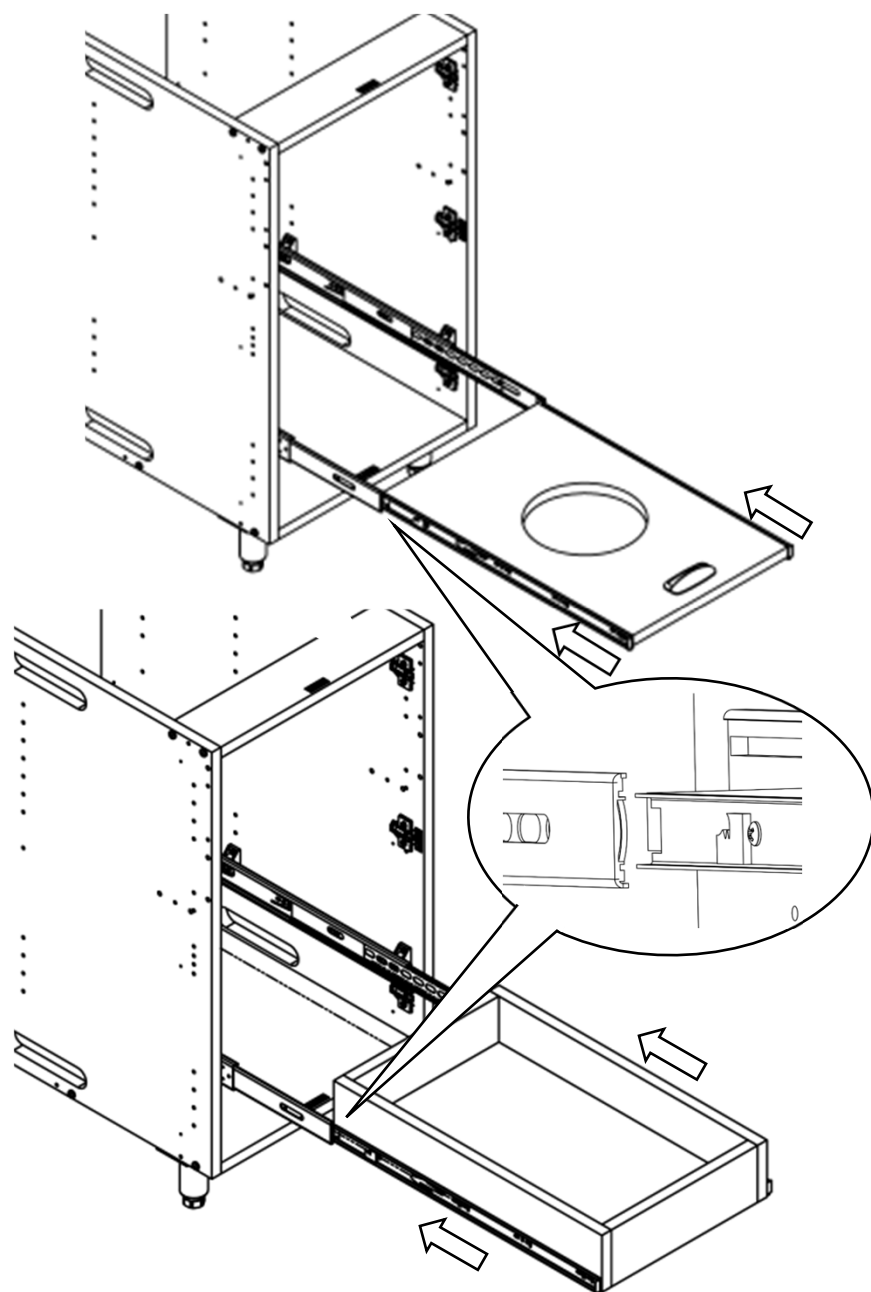



Carefully slide the propane pull-out or roll-out tray into the larger runner members by inserting the smaller runner members into the plastic guides at the front of the larger members. You should hear a 'click' when fully inserted.

Removing Propane Pull-Out Trays or Roll-Out Trays

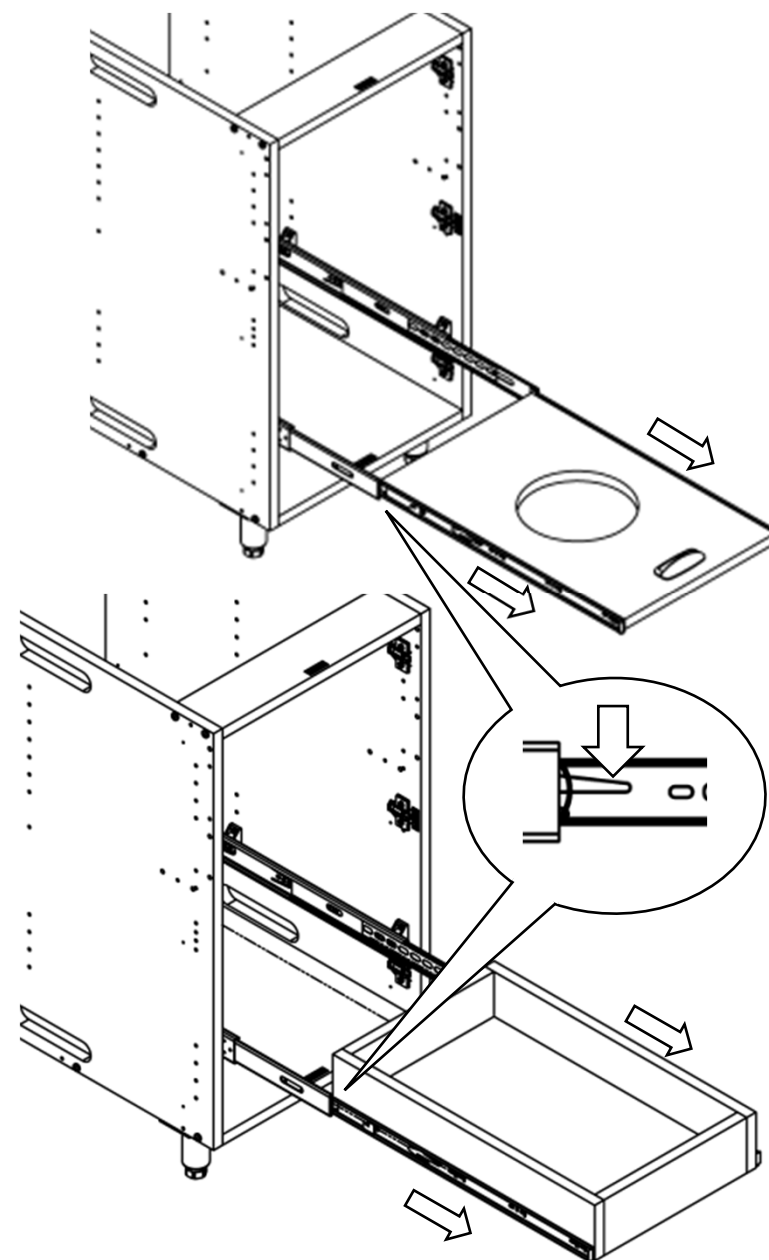



Carefully remove the propane pull-out or roll-out tray by pressing down on the white tab pull runner member and pulling apart from larger runner member.

Installing Doors

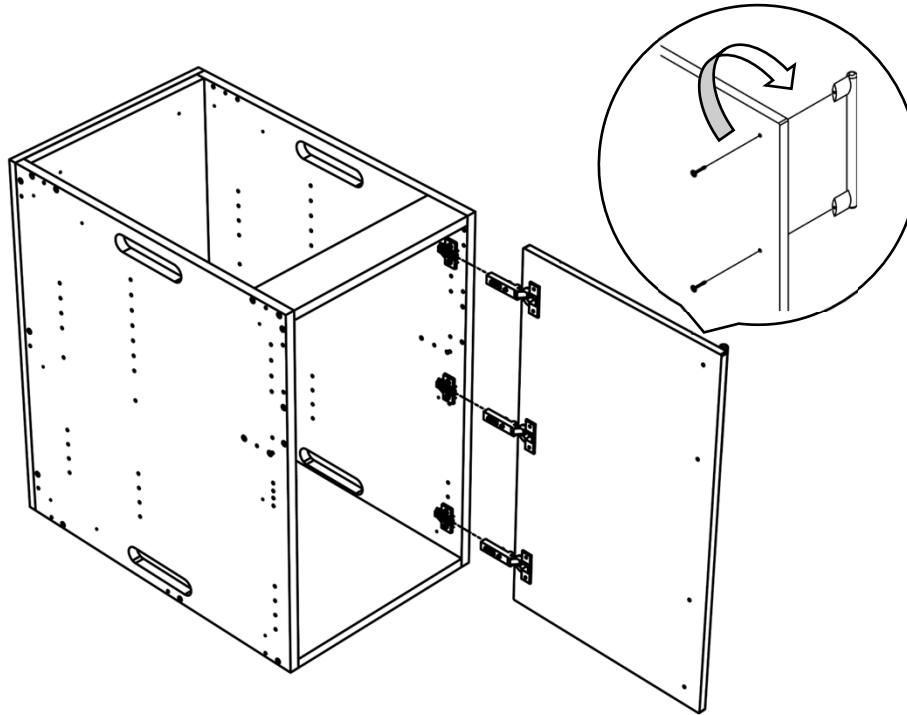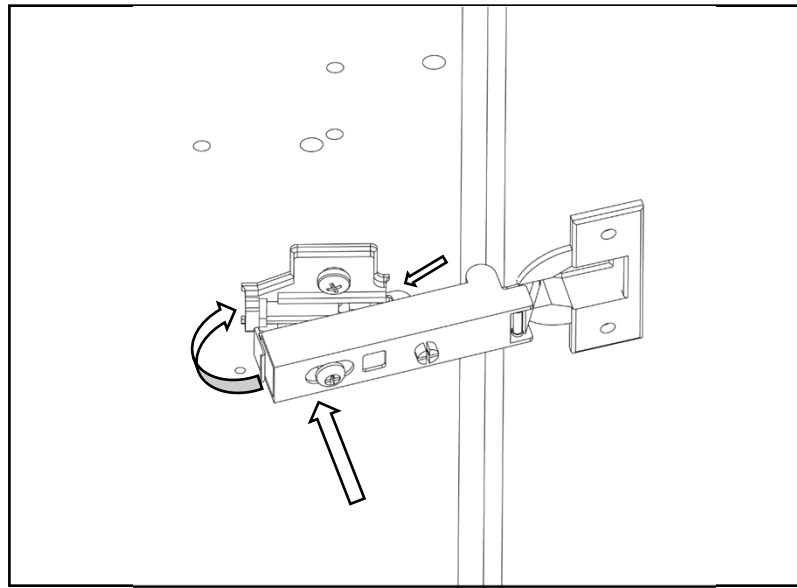

Reattach all doors by locating the small “hooks” on the underside of the Soft-Close Hinge and hook them under the front of the Hinge Plate, then press the back of the hinge towards the plate until it “clicks” into place. Repeat for the remaining hinges.

Removing Doors

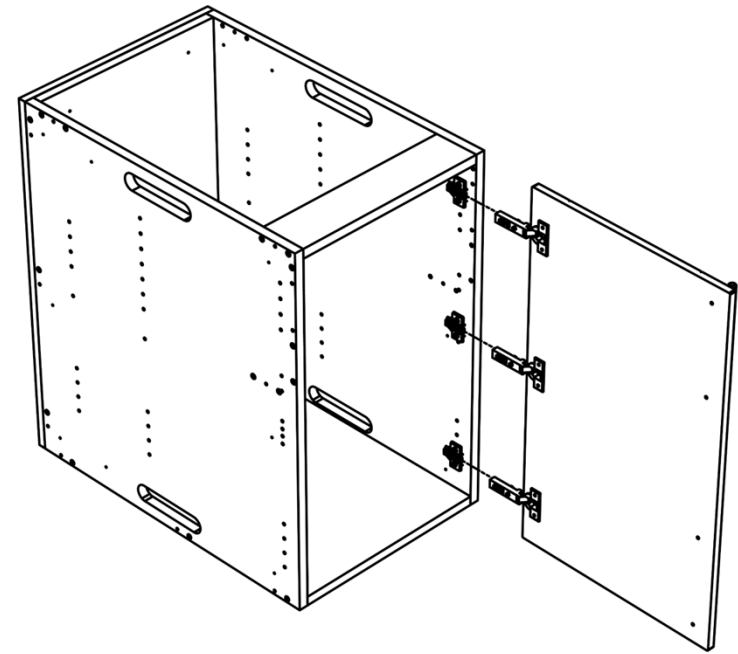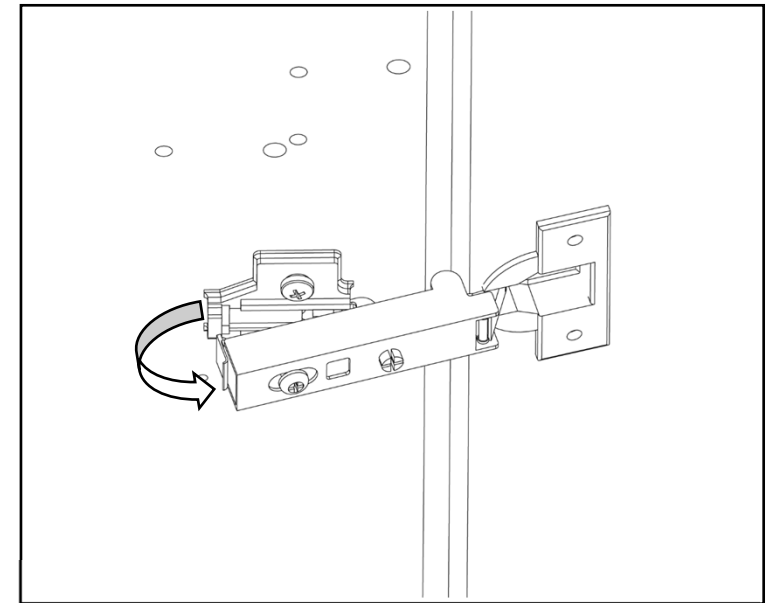

Find the latch on the back of each hinge and pull it towards you to disconnect each Soft-Close Hinge from its Hinge Plate. Once you have disconnected each Soft-Close Hinge, carefully remove the door and place it to the side, laying it on a protected surface to avoid any unnecessary damage. Repeat for all doors.

Care and Adjustment Guide

AFTER INSTALLATION CARE

After your cabinets have been installed, wipe down all surfaces with a damp cloth to remove dust. A soft cloth or sponge with mild dishwashing liquid can be used if needed.

EVERYDAY CARE

Salt Water Environments: Oceanfront environments with salt air and sea spray will require regular maintenance and cleaning to prevent rust from forming on the handles, hinges, legs, and drawer runners. Clean stainless steel surfaces several times a month to keep the chemical reaction from the salt from gaining a foothold on the hardware. With regular cleaning, your cabinets will look like new for many years. To achieve maximum corrosion and stain resistance, the surface of the stainless steel must be kept clean.

NEVER use abrasive cleaners, scouring pads, or powdered cleansers.

HARDWARE CARE

Use mild soap and warm water to clean stainless steel legs and door handles. Thoroughly dry hardware surfaces after cleaning. **DO NOT** use silver or brass polish.

GRILL & SIDE BURNER CABINET

Most gas-fed appliances require an insulated jacket when installed near combustible materials. Please refer to your specific island configuration for requirements.

Door Alignment

Cabinets feature a 6-way adjustable hinge that will allow you to adjust and align all the doors after installation

1. The center screw will adjust the door from side to side
2. The top and bottom screws in the hinge plate will allow adjustment up and down
3. The back screw will adjust the door in and out

